


Declaration of Performance
MEDITE TRIMAX
MEDITE TRICOYA MDF .H-2
Springfarm Architectural Mouldings Ltd
Newpark Industrial Estate
Antrim BT41 2RU

Product Type	Intended Use	AVCP*	Notified Body Reference
MDF.H-2	External and internal uses as non-structural components	4	Not Applicable
*Assessment and verification of constancy of performance system according to Annex V of regulation (EU) No305/2011			

Declaration Performance						
Essential Characteristics	Performance					Harmonised Technical Specification
Thickness Range (mm)	4 to <9	9 to <12	12 to <15	15 to <18	18	EN 13986:2004+A1:2015
Internal bond after boil test (N/mm2)	0.8	0.8	0.8	0.8	0.8	
Internal Bond (N/mm2)	0.65	0.65	0.65	0.65	0.65	
Swelling in Thickness (24hrs) %	2.5	2.0	2.0	1.5	1.5	
Release of Formaldehyde	E1	E1	E1	E1	E1	
Reaction to Fire	NPD	E-s2,Do	E-s2,Do	E-s2,Do	E-s2,Do	
Water Vapour Permeability μ	NPD	NPD	NPD	NPD	NPD	
Airborne Sound Insulation (Surface Mass) (R)	NPD	NPD	NPD	NPD	NPD	
Thermal Resistance R value m2K/W	0.056	0.085	0.114	0.150	0.180	
Biological Durability	Use classes 1, 2, 3 & 4					
Release (content) of Pentachlorophenol (PCP)	≤ 5ppm	≤ 5ppm	≤ 5ppm	≤ 5ppm	≤ 5ppm	

The performance of the product identified is in conformity with the declared performance
Based on Medite Europe Ltd data subject to factory production control
Manufactured according to EC Directive 89/106/EEC (Construction products Directive)
Conform with EN13986, Annex ZA
Date: 23/07/2025

Signed for and behalf of the manufacturer by:

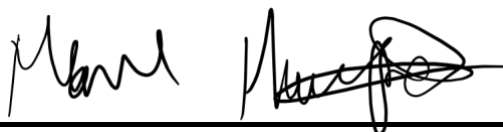

Mark Kirkpatrick, Technical Director
Springfarm Architectural Mouldings Limited